




30 Years Qualities Precipitation
30 Years Advance with The Times


Richpeace Embroidery Machine Series
Support Customization, Meet Your Requirement For Quality

20221229

Richpeace Computerized Cap/Tubular Embroidery Machine

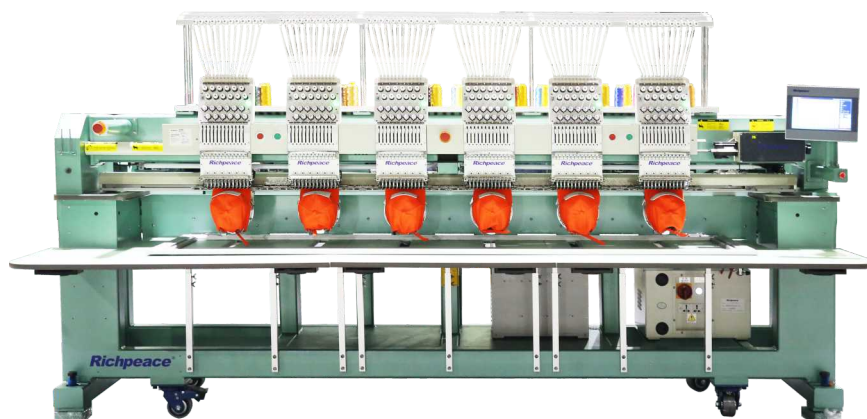

RPCE-NM-TC-6-360x450-LB-F12-VR1-NA-1P220

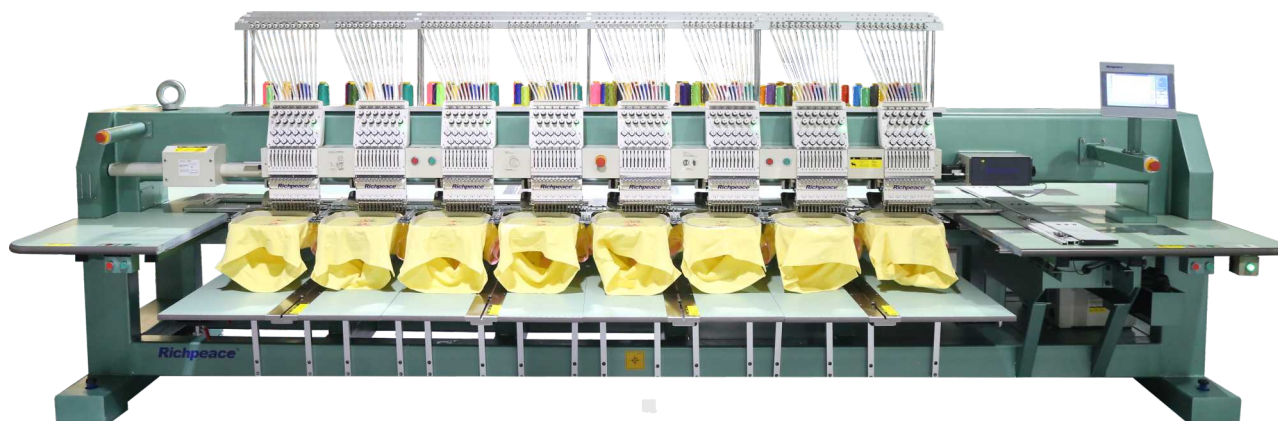

RPCE-NM-TC-8-360x450-HB-F12-VR1-NA-1P220

Application

Richpeace®

Suitable for the embroidery process of clothing, shoes and hats, bags, toys, home textiles, furniture and other products.



Richpeace®

TIANJIN RICHPEACE AI CO., LIMITED

Add: No.6 Baozhong Road, Baodi Economic
Development Area, Tianjin City, 301800 China
Email: sales@richpeace.com www.richpeace.com

Tel: +86-22-22533456
Fax: +86-22-22530075



Features

Richpeace®



3D embroidery



Leather embroidery



Letter stitching



Costumes, cheongsam and other silk garment

Richpeace Cap / Tubular Embroidery Machine, low noise, stable operation, smooth and bright stitching. Integrated cap embroidery, ready-made garment embroidery and flat embroidery in one machine, which can be freely converted. Suitable for embroidery on caps, RMG and cut pieces, multiple functions and high efficiency.



Tubular embroidery: embroidery requirements on T-shirts, sportswear or other types of ready-made garments.



Cap embroidery: 300° embroidery around cap.



Flat embroidery: Detachable front tables can realize normal flat embroidery after installation.



Sock embroidery (optional): For embroidery on finished socks.



Pants embroidery (optional): Embroidery on sleeves and trouser legs.

Main Configurations




Richpeace Model III computer control system: 10.1-inch (LB)/15.6-inch (HB) LCD touch screen, screen display refresh rate 50ms/time, real-time dynamic display.




Full servo motor drive for Main shaft and X/Y shaft: high precision, fast speed, low noise.



Latest Thread guiding system: Independent and smoother threading without entangled, less breakage rate.

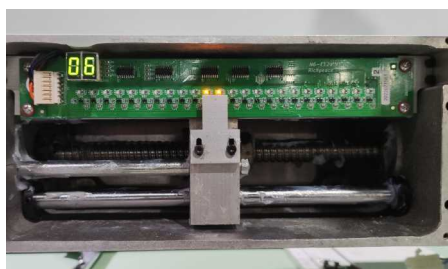

Lead screw color change: color-changing speed as fast as 1.2 seconds/ 9 needles, with more accurate position.

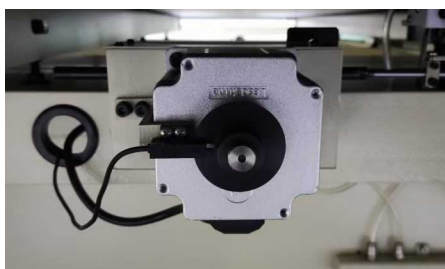

Dynamic motor thread trimmer: Controllable thread length, higher efficiency, quieter and more environmentally friendly.



New upper thread holder: Reduce the rate of thread breakage.



Widened transmission linear guide rail: low noise and long life.



Cap frame: standard configured 1 cap frame/head, 2 cap hoops/head, one frame base.



Tubular frame: standard configured 6 sizes (295mm, 240mm, 208mm, 190mm, 145mm, 95mm), two sets/head.

Models

Richpeace®

Recommended Models	Heads	Needles	Flat Embroidery Area	Machine Size (L×W×H)
RPCE-NM-TC-2-360×450-LB-F9-VR1-NA-1P220	2	9	360mm×450mm	1760mm×1415mm×1650mm
RPCE-NM-TC-4-360×450-LB-F9-VR1-NA-1P220	4	9	360mm×450mm	2480mm×1415mm×1650mm
RPCE-NM-TC-6-360×450-LB-F9-VR1-NA-1P220	6	9	360mm×450mm	3200mm×1415mm×1650mm
RPCE-NM-TC-8-360×450-HB-F9-VR1-NA-1P220	8	9	360mm×450mm	4722mm×1700mm×1650mm
RPCE-NM-TC-10-360×450-HB-F9-VR1-NA-1P220	10	9	360mm×450mm	5442mm×1773mm×1650mm
RPCE-NM-TC-12-360×450-HB-F9-VR1-NA-1P220	12	9	360mm×450mm	6162mm×1773mm×1650mm

Note: Optional 6needles/9needles/12needles/15needles, head distance 360/400/500mm for options.


Parameters

Maximum working speed	Flat embroidery	1000rpm	Embroidery area (Head Distance of 360mm)	Flat embroidery	360×450mm
	Tubular embroidery	1000rpm		Tubular embroidery	290×290mm
	Cap embroidery	850rpm		Cap embroidery	300×60mm
Stitch Length	0.1mm~12.7mm		Main Shaft /frame drive	Full servo motors	
Thread trimming	Dynamic Motor Thread Trimmer		Thread Hooking	Motor independent hooking	
Stitches Capacity	130 million		Power supply	Single phase 220V / 3 phase 380V	


Optional devices




Spring metallic threading device

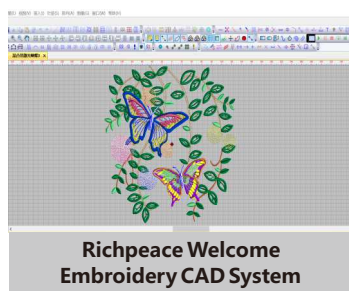

Richpeace Welcome Embroidery CAD System

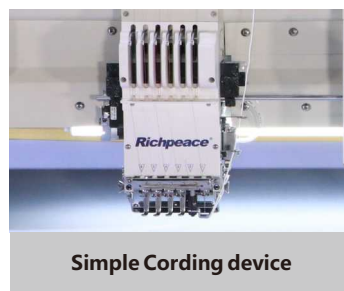


Simple Cording device

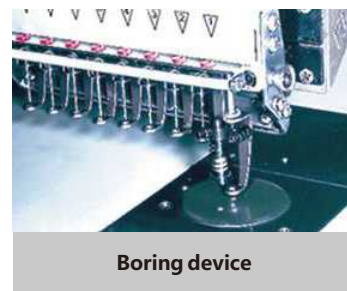


Boring device



Tracing Cording Device

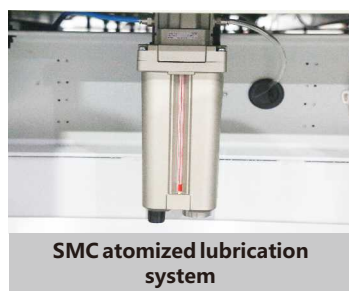

SMC atomized lubrication system

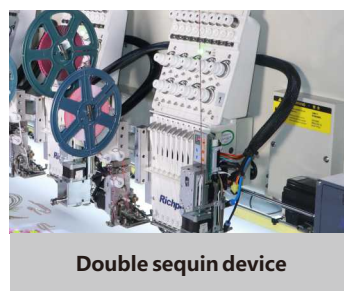

Double sequin device



Laser cutting device